



Part Number	LSUM 050R4P 0166F EA AB
Document Number	V01_20140217

Product specification

LSUM 050R4P 0166F EAAB



Product specification

Version	Date	Change Description	Author
V00	27 . JAN . 2013	Product specification	S.W. SON
V01	17 . FEB . 2014	Update product specification	S.W. SON

Product specification

■ Specification

1. Primary specification

Part number	Capacitance (F)	Resistance DC (mΩ)	Max. Current (A) ¹	Leakage Current (mA)
LSUM 050R4P 0166F EA AB	166	7.8	1900	< 28

2. Power & Energy

Part number	Specific Energy (Wh/kg)	Stored Energy (Wh)
LSUM 050R4P 0166F EA AB	4.2	58.6

3. Standard & Reliability

Rated Voltage	50.4V	
Max. Voltage ²	54.0V	
Capacitance Tolerance	0% / +20%	
Resistance Tolerance	< Spec. Value	
Operating temperature range	-40 ~ 65 °C	
Storage temperature range	-40 ~ 70 °C	
Max. continuous current	ΔT = 15 °C	
	ΔT = 40 °C	
Endurance	After 1500 hours application of Rated voltage DC at 65 °C, the capacitor shall meet the following limits.	
	Capacitance change	Within 20% of initially specified value
	Internal resistance change	Within 100% of initially specified value
Shelf life	After 1500 hours storage at +65 °C without load shall meet specification of endurance	
Life Time (25°C)	After 10 years at rated voltage and +25 °C	
	Capacitance change	Within 20% of initially specified value
	Internal resistance change	Within 100% of initially specified value
Cycle Life (25°C)	After 1,000,000 cycles between rated voltage to half rated voltage at +25 °C	
	Capacitance change	Within 20% of initially specified value
	Internal resistance change	Within 100% of initially specified value

4. Monitoring

Part number	Temperature sensor	Temperature interface	Cell voltage monitoring	Balancing
LSUM 050R4P 0166F EA	PTC Thermistor	Analog	Over voltage Alarm	Passive & Active

* Remarks

1) Current for 1sec discharge from the rated voltage to the half of it in constant current discharge, do not use as an operating current.

2) Non repeated, not to exceed 1sec.

Product specification



■ Safety & Physical Protection

Isolation voltage (DC)	Short circuit current(A)	Environmental Protection	Shock & vibration Protection
2.5kV	6500A	-	-

Dimension in mm (not to scale)

■ Geometric properties

Part number	Dimension (mm)			Weight (kg)
	Length	Wide	Height	
LSUM 050R4P 0166F EA AB	136±1	590±1	181±1	14±0.5

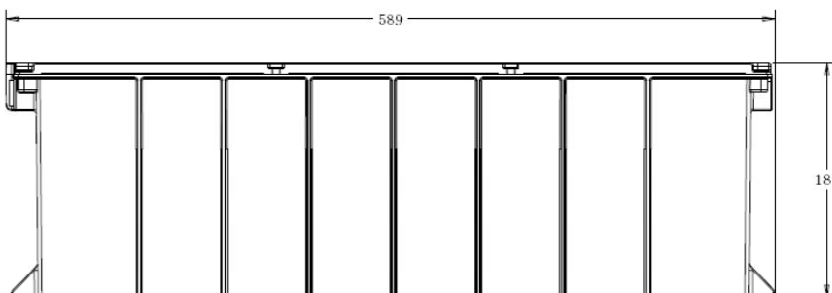

Technical Information (1)

How to calculate specification value

1. The Measurement Methods


1-1 Capacitance

Apply rated voltage and charge for 5min after the constant current / constant voltage power supply has achieved the rated voltage. After a charge for 10min has finished, discharge with 10mA/F to 0.1V.

Measure the time t_1 to t_2 where the voltage between capacitor terminals at the time of discharge reduces from V_1 to V_2 as shown figure and calculate the capacitance value by the following formula:

- 1) Constant current charge with 10mA/F to V_R
- 2) Constant voltage charge at V_R for 5min
- 3) Constant current discharge with 10mA/F to 0.1V

$$C = \frac{I \times (t_2 - t_1)}{V_2 - V_1}$$

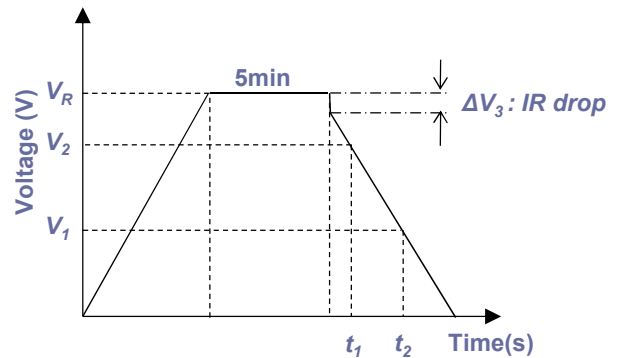


1-2 Resistance

The AC and DC resistance of a capacitor shall be calculated by the following formula;

$$R_{AC} = \frac{V}{I_{AC}} \quad (\text{The frequency of the measuring voltage shall be 100Hz or 1kHz})$$

$$R_{DC} = \frac{\Delta V}{I_{DC}}$$

Where R_{AC} is the AC internal resistance (Ω);
 R_{DC} is the DC internal resistance (Ω);
 V is the effective value of AC voltage (V);
 ΔV is the drop voltage for 10ms (V);
 I_{AC} is the effective value of AC current (A);
 I_{DC} is the discharge current (A);

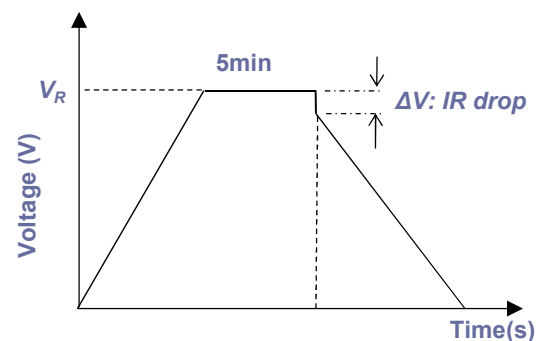

Technical Information (2)

1-3 Leakage current & Self discharge

The leakage current shall be measured using the direct voltage appropriate to the test temperature(25℃) for 72hrs. Self discharge voltage shall be measured after charging up for 12hrs, disconnect the capacitor terminals from the voltage source. The capacitor shall be kept under standard condition for 100hrs.

1-4 Maximum current

Current for 1sec discharge from the rated voltage to the half of it in constant current discharge,

$$I_{Max} = \frac{V_R - 0.5 \cdot V_R}{\Delta t / C + R_{DC}}$$

Where I_{Max} is the Maximum current (A);

Δt is the discharge time (sec), 1 sec in this case ;

C is the capacitance (F);

R_{DC} is the DC resistance (Ω);

V_R is the rated voltage (V).

1-5 Maximum stored energy (E_{MAX})

$$E_{MAX} (Wh) = \frac{\frac{1}{2} C V_R^2}{3600}$$

2. The Standard Atmospheric Condition for Measurement

All test and measurements shall be made under standard atmospheric conditions for testing. Before the measurements are made, the capacitor shall be stored at the measuring temperature for a time sufficient to allow the entire capacitor to reach this temperature. The period as prescribed for recovery at the end of a test is a normally sufficient for this purpose.

Temperature : 15~35 ℃

Relative humidity : 25~75%

Air Pressure : 86~106 kPa