



6.77 in.
172 mm

12.95 in.
329 mm


8.9 in.
226 mm

CYCLE LIFE

CAPACITY AT DIFFERENT CYCLES AT 100% DOD

100 cycles	99.7
500 cycles	96.3
1000 cycles	90.8
1500 cycles	85.4
2000 cycles	80.1

24V50AH LITHIUM ION BATTERY

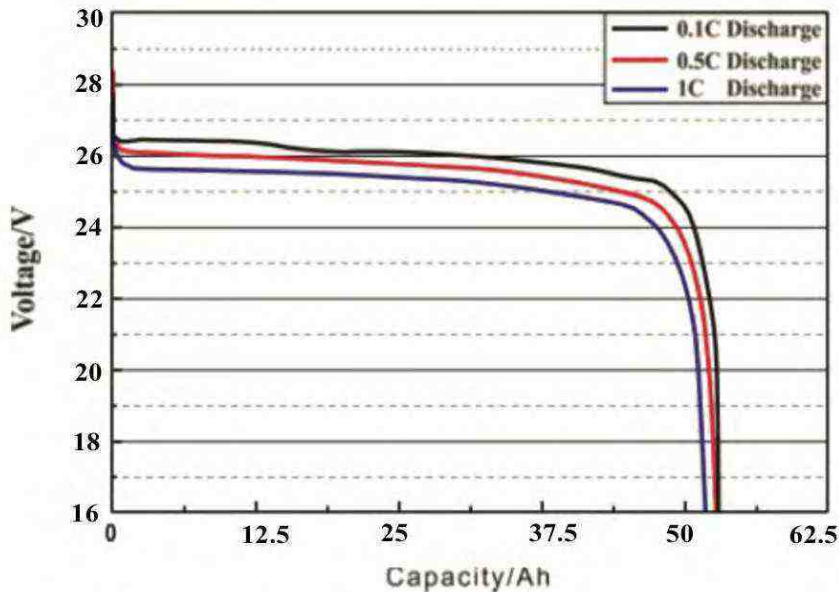

Amp Hours: 50AH

Voltage: 24V Nominal

Peak Amps: 100 amps for 3-5 seconds

Life Expectancy: 3000-5000 Cycles

Weight (Battery only): 32lbs. / 14.5kg

Efficiency: 99%

Minutes at 20A: 150

Max Continuous Charge: 1C = 50A

Max Continuous Discharge: 1C = 50A

Operating Temperature: -4 + 158 F / -20 + 70 C

Auto Low Voltage Cutoff: 16V -20V

Auto Over Voltage Cutoff: 31.6V


Charge Voltage: CC/CV 29.4V/Float 27.6V

Max Series Connection: 2


Max Parallel Connection: 4

Cell Type: Cylindrical LiFePO4

constant voltage charging characteristic
(0.5CA, 25Celsius scale)

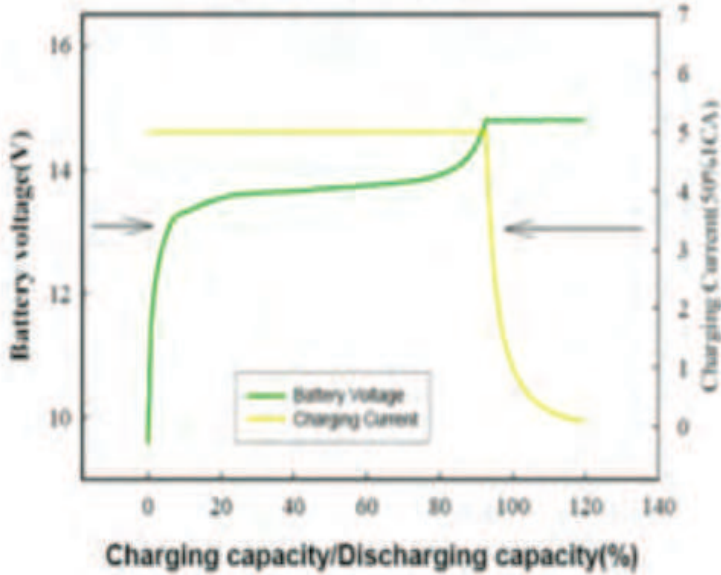

Temperature effects on capacity at 0.2C

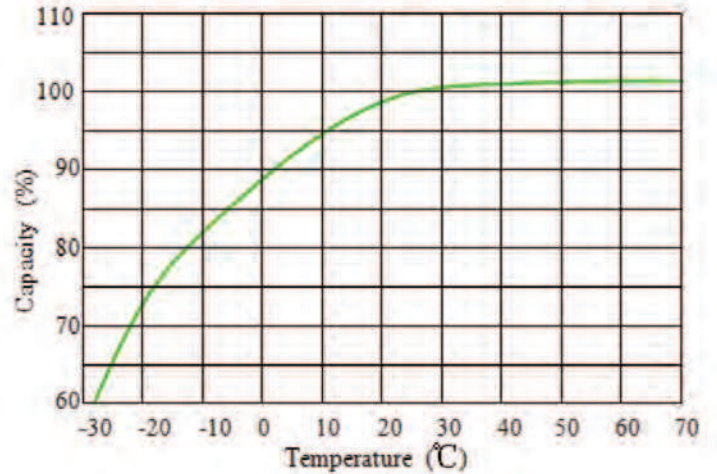

Cycle life with DOD at 25°C, 0.2C

